




(a) Begin




(b) `cin >> num`

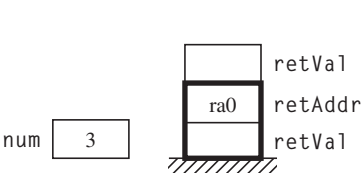


(c) Push storage for return value `i`

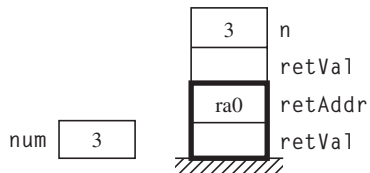


(d) Push actual parameter

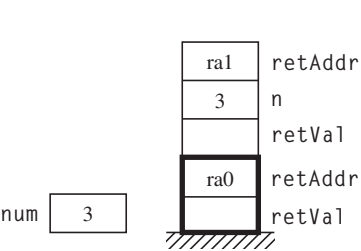


(e) Push return address

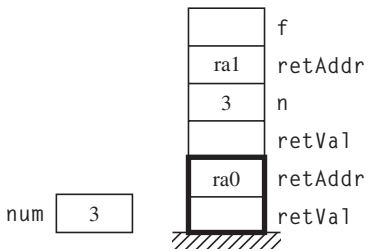

(f) Push storage for local variable `f`

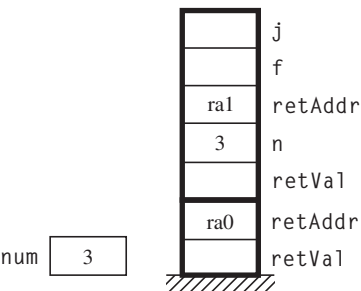

(g) Push storage for local variable `j`

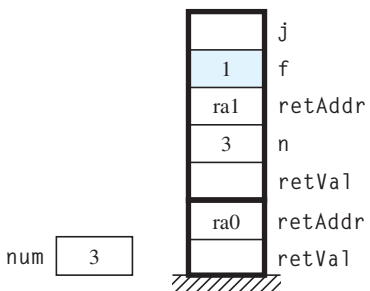

(h) `f = 1`